

WMHC-445 - Wall Mount Hot & Cold Shower

The Pool Shower, Inc.

Dallas, Georgia

www.poolshower.com—1-866-shower1

Manufacturers of Quality Stainless Steel Showers



WMHC-445 PARTS LIST:

- | | | |
|---|-------------|---|
| ① | DEL-78 | 2.5 GPM Chrome Plated Brass Shower Head |
| ② | SR-40 | 1/2" x 39" 304 sch 40 Stainless Steel Riser TBE |
| ③ | WB-2 | 2" Stainless Steel Wall Bracket & Flange
Stainless Steel Phillips Oval Head Screw (2) - size #8, length: 1-1/2"
Stainless Steel Socket Point Type Set Screw Thread Size: 1/4-20 |
| ④ | BA1 | 1/2" - 14 NPT Female Inlet Chrome Plated Brass Riser Union Connector |
| ⑤ | 445-LESSSPT | Chrome Plated Brass Lever Handle Faucet - 1/2" NPT Supply Arms - 4"- 8-3/8" Centers |

Accessories may vary due to availability and slight modifications by the manufacturer.

Installation Guidelines

Recommended Shower Head Height: 78"

Water Supply Lines should be roughed in at approximately 40" from flooring surface with 4 to 8 inch spread.

- Place trim flanges over 1/2" water line pipes.
- Secure supply arms to piping. Position them as close as possible to desired location to mount faucet.
- Flush lines.
- Adjust supply arms to desired centers making sure gaskets are in place.
- Tighten arms to body with a 12" crescent wrench making sure fitting is level.
- Attach Union Connector to Riser. Install Riser on faucet with 7/8" nylon washer pressed firmly into faucet spout opening. Tighten Connector.
- Assemble Mounting Bracket and slide over Riser. Tighten set screw when at a desired position.
- Attach unit to wall with stainless steel screws by marking position using wall bracket as a guide.
- Attach Shower Head to Riser. Teflon Tape is not needed.

NOTE: A check valve may be required inside the wall for the hot & cold water supply lines. This part is not provided by The Pool Shower, Inc., but is available through most plumbing contractor.



ROUNDING IN DIMENSIONS MAY VARY AND ARE SUBJECT TO CHANGE—NO RESPONSIBILITY IS ASSUMED FOR USE OF SUPERCEDED OR VOIDED DATA.



WWW.POOLSHOWER.COM
1-866-SHOWER1

MODEL NUMBER:

WMHC-445

JOB NAME :

ITEM NO.

SUBMITTED AS SHOWN:



SUBMITTED AS NOTED :

SEE ATTACHED FOR SUBMITTED MODIFICATION :



SIDE VIEW

FRONT VIEW

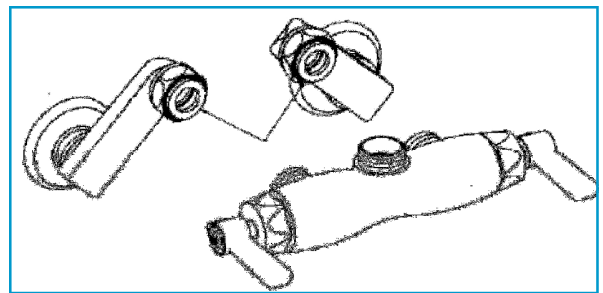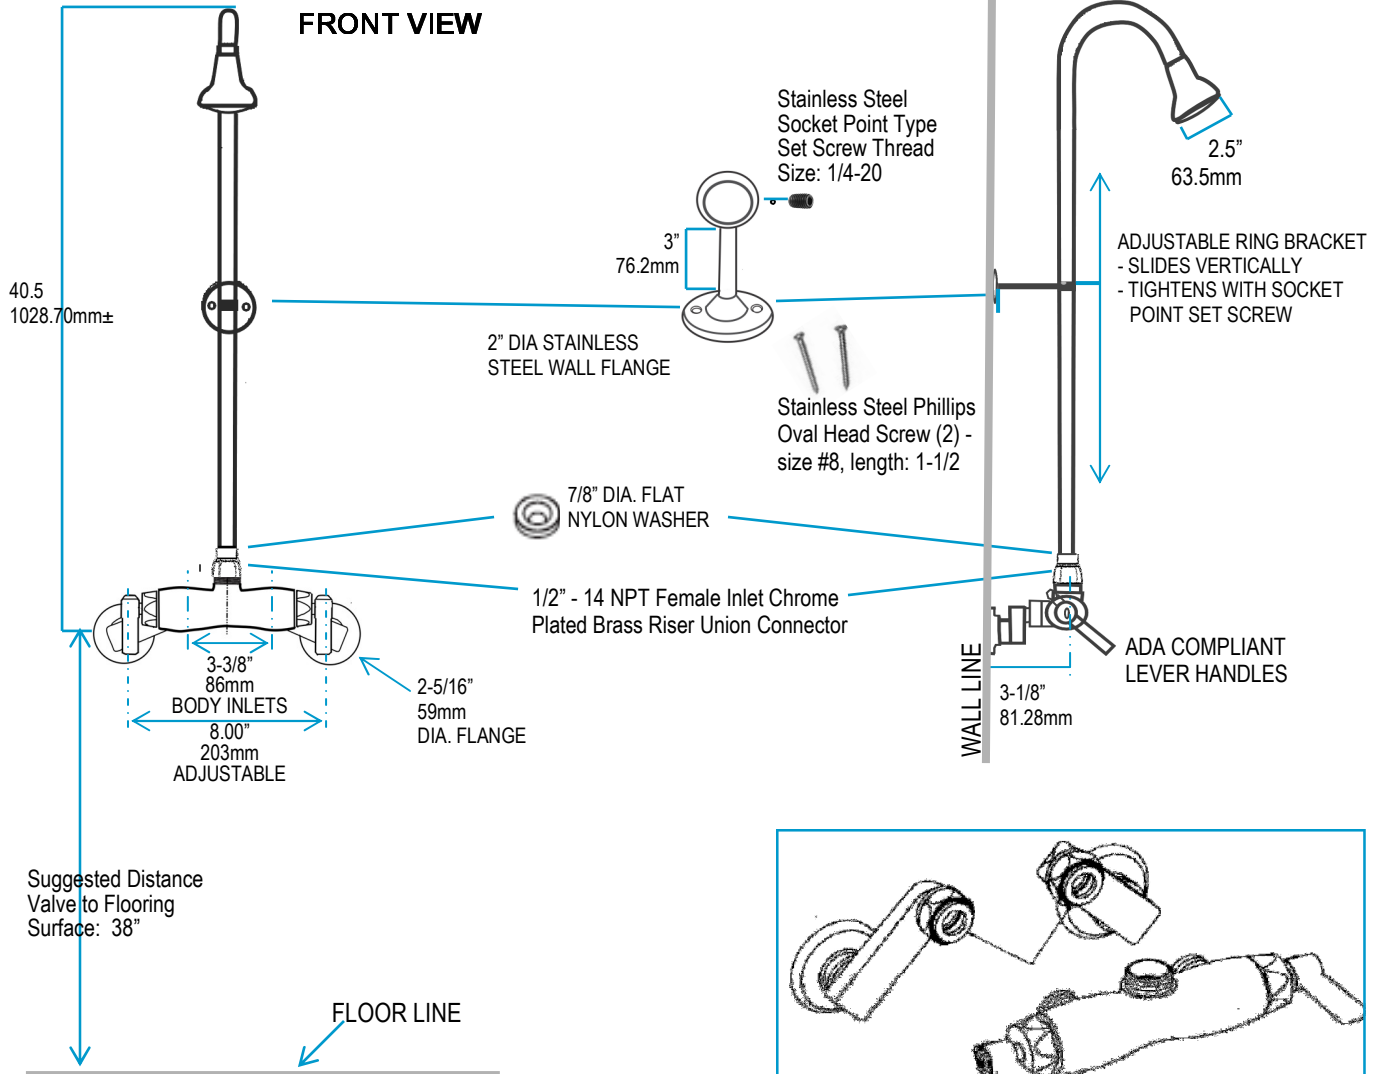

DIMENSIONS MAY VARY PLUS OR MINUS 1/2" (12.7MM)

TECHNICAL DATA:

- EXPOSED WALL MOUNTED TWO VALVE SHOWER FITTING
- FINISH: CHROME PLATED BRASS
- 1/2" X 40" STAINLESS STEEL RISER TBE
- LEVER HANDLES
- 1/2" NPT FEMALE INLETS
- ADJUSTABLE SUPPLY ARMS
- 2.5 GPM SHOWER HEAD
- ASME A112.18.1M COMPLIANT
- CSA B125 COMPLIANT

DATE:

BY:

CHCKD:

APP'D:

REV:

OPTIONAL ACCESSORIES & UPGRADES

NOTE:

Flush supply lines before installing valve to remove chips and dirt which can become lodged in the seat washer and cause the faucet to malfunction.

WINTERIZING:

It is recommended that a shut-off valve be installed in the water line going to the pool shower connection where freezing temperatures can occur. Accessories and valve handles can be removed and other parts partially disassembled for complete protection against freeze damage.


DO NOT USE A PIPE WRENCH WHEN TIGHTENING SHOWER PARTS. THIS CAN DAMAGE THE FINISH.

FREEZE DAMAGE IS NOT COVERED BY THE WARRANTY.

QUESTIONS?

Give us a call: 1-866-shower1

FOOT SHOWER ASSEMBLY ACCESSORY—#AV-442-CHV

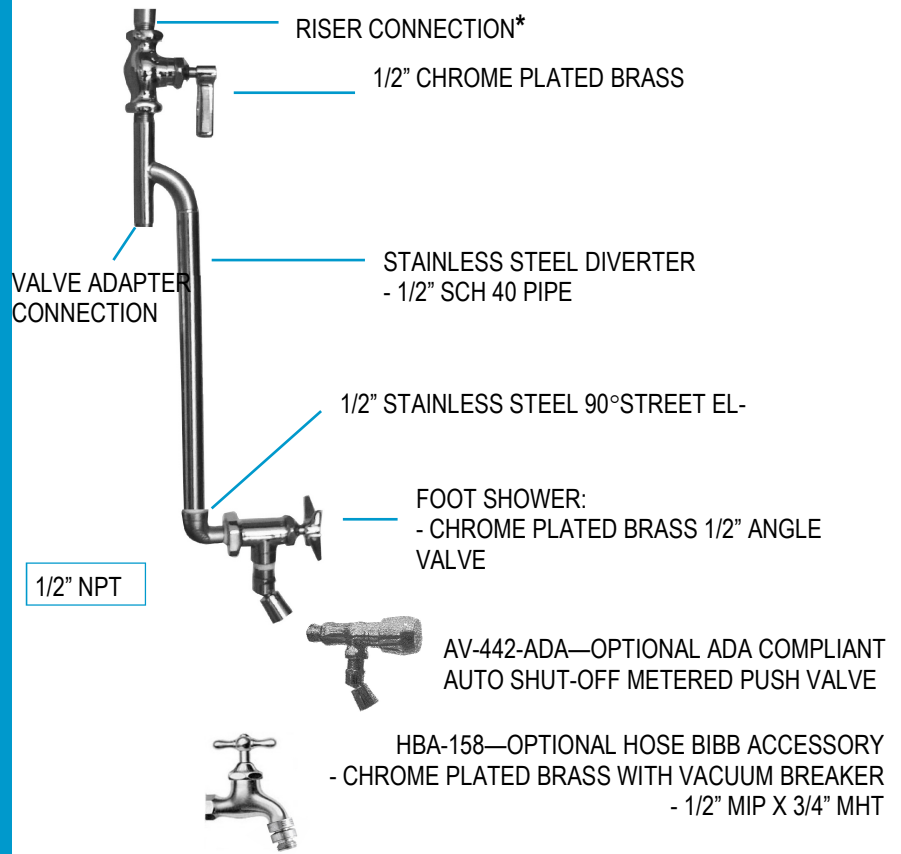

*39" RISER IS REPLACED WITH 32" RISER WHEN DIVERTER IS USED.

OPTIONAL SHOWER HEADS

4"-19" - Stainless Steel or Chrome Plated Brass




WMHC-445 Shower Units with 4" and larger shower heads have riser with 90° bend



HAND SPRAY & 60" STAINLESS STEEL HOSE

COMPLETE WITH HAND SPRAY BRACKET AND DIVERTER

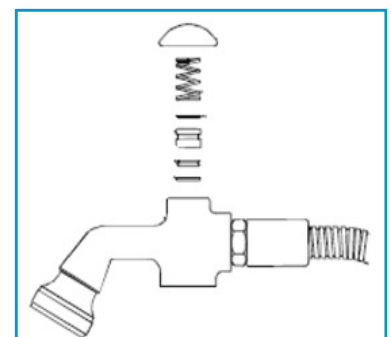

WARRANTY / RETURN POLICY MAINTENANCE



All items manufactured by The Pool Shower, Inc. are manufactured in Dallas, Georgia, and we guarantee 100% customer satisfaction. Only the finest stainless steel materials are used. Each piece is individually crafted and is electro-polished, which smooths, polishes, and deburrs the product surface, making it easier to clean and resistant to contamination.

Stainless steel materials come with a ten (10) year limited warranty against defect and workmanship. All accessories not manufactured by The Pool Shower, Inc. are covered by warranty for a period of two (2) year from the receipt by the original purchaser. This warranty will become void if merchandise is damaged, improperly maintained or installed, or modified without the authorization from our licensed distributor.

The warranties include replacement or repair of defective parts and an unconditional guarantee against manufacturing defects. The company will replace or repair at its option any equipment manufactured or supplied as part of our merchandise found to be defective if the conditions are met. Any shipping fees associated with the return or replacement of merchandise covered by this warranty will be incurred by The Pool Shower, Inc. **We reserve the right to determine if damage to a unit or any parts is the direct cause of not complying with manufacturer's guidelines. Special Order non-stock items are NOT returnable.**

WARNING: FREEZE DAMAGE is NOT covered by the warranty.

It is very important to winterize outdoor showers. Just like water faucets and hose bibbs, they are susceptible to freeze damage. The unit(s) must be drained in freezing conditions. In extremely cold temperatures it is advisable to remove faucets and hose bibbs and store them during winter months. Vented plugs are available through The Pool Shower, Inc.

Although care was taken in the design and manufacture of your new pool shower to ensure it's safe operation, we accept no responsibility for the improper use or installation of equipment, as it is no longer in our control. Buyers have the right of inspection, approval, and acceptance within thirty days of arrival.

We will not be responsible for transportation or labor for items returned for repair or replacement of parts where the merchandise was not properly installed or maintained. An authorized distributor must request a Return Authorization Form from The Pool Shower, Inc., and submit it before the return can be approved. A 10% re-stock fee and the cost of shipping will be withheld on returns.

Our Customer Service Department is available for ordering replacement parts or if it should become necessary for you to return your Pool Shower unit. We can also repair or replace damaged parts for a minimal fee. Call **678-363-3939** or **1-866-SHOWER1** for return authorization and instructions, or E-mail us at info@poolshower.com. Additional information is available at www.poolshower.com.

CAUTION: Where outdoor temperatures reach more than 90 degrees use caution to prevent burns to skin from scalding water. When a shower unit is connected to an exposed water hose, it is recommended that a light colored hose be used in order to reduce solar gain and keep water temperature inside the hose near the ambient temperature. Water is stored in the body of the shower unit when not in use, and although the patented satin finish on our stainless steel components has minimal solar gain, in warm climates water temperatures inside the hose or shower unit can reach more than 110° which can result in minor burns to delicate skin tissue.

HOT & COLD SHOWER UNITS: Some states require Pressure Balancing Valves for hot & cold valves. These are available through any plumbing supply company and can be added to the water supply lines feeding into the shower valve. When hot water is used for bathing it is always recommended that the temperature on the water heater be set at 110° or less in order to prevent the risks of minor burns from scalding water.

The Pool Shower, Inc. does not accept responsibility for bodily injury caused from improper use of its equipment or failure to use caution when operating the shower unit(s). It is recommended that the shower unit(s) be turned on for 30 seconds before contact with water spray in order to avoid accidental scalding and ensure safe use of this product.

Stainless steel does not "rust" as you think of regular steel rusting with a red oxide on the surface that flakes off. If you see red rust it is probably because the product was contaminated, steel or iron scratched the surface, and particles became embedded in the surface. These particles are much less corrosion resistant than the stainless steel and rust, making it appear that the stainless steel is rusting. Stainless steel should never be cleaned with steel wool or an abrasive cleaner. Brillo and S.O.S. pads are made of steel wire. Iron particles from these pads will contaminate the surface. NEVER use an iron-based product on stainless steel. Damp steel or cast iron can be left behind causing the stainless steel to stain (rust). In most cases, light staining can be removed with a fine abrasive cleaner, scouring powder, or non-metallic abrasive scouring pad such as a Scotch Brite® pad. Apply the cleaning product in the same direction as the polish to minimize damage. Stainless Steel cleaner is suggested and can be purchased at most home improvement stores. WD-40 is also an excellent cleaner and polisher of stainless steel. If there are obvious polishing lines rub in the same direction as the grain of the steel to minimize surface finish damage.