

WMHC-445 - Wall Mount Hot & Cold Shower

The Pool Shower, Inc.

Dallas, Georgia

www.poolshower.com—1-866-shower1

Manufacturers of Quality Stainless Steel Showers



WMHC-445 PARTS LIST:

- ① DEL-78 2.5 GPM Chrome Plated Brass Shower Head
- ② SR-40 ½"x 39" 304 sch 40 Stainless Steel Riser TBE
- ③ WB-2 2" Stainless Steel Wall Bracket & Flange
Stainless Steel Phillips Oval Head Screw (2) - size #8, length: 1-1/2"
Stainless Steel Socket Point Type Set Screw Thread Size: 1/4-20
- ④ BA1 1/2" - 14 NPT Female Inlet Chrome Plated Brass Riser Union Connector
- ⑤ SDV-372-8 Hot & Cold Stainless Steel Valve - 8" Center—ADA Compliant Lever Handles

Accessories may vary due to availability and slight modifications by the manufacturer.

Installation Guidelines

Recommended Shower Head Height: 78"

Water Supply Lines should be roughed in at approximately 40" from flooring surface with 4 to 8 inch spread.

- Place trim flanges over 1/2" water line pipes.
- Secure supply arms to piping. Position them as close as possible to desired location to mount faucet.
- Flush lines.
- Adjust supply arms to desired centers making sure gaskets are in place.
- Tighten arms to body with a 12" crescent wrench making sure fitting is level.
- Attach Union Connector to Riser. Install Riser on faucet with 7/8" nylon washer pressed firmly into faucet spout opening. Tighten Connector.
- Assemble Mounting Bracket and slide over Riser. Tighten set screw when at a desired position.
- Attach unit to wall with stainless steel screws by marking position using wall bracket as a guide.
- Attach Shower Head to Riser. Teflon Tape is not needed.

NOTE: A check valve may be required inside the wall for the hot & cold water supply lines. This part is not provided by The Pool Shower, Inc., but is available through most plumbing contractor.



**ANOTHER GREAT UPGRADE
—THE NEW HOT & COLD
STAINLESS STEEL VALVE!**

ROUNDING IN DIMENSIONS MAY VARY AND ARE SUBJECT TO CHANGE—NO RESPONSIBILITY IS ASSUMED FOR USE OF SUPERCEDED OR VOIDED DATA.



WWW.POOLSHOWER.COM
1-866-SHOWER1

MODEL NUMBER:

WMHC-445

JOB NAME :

ITEM NO.

SUBMITTED AS SHOWN:


SUBMITTED AS NOTED :

SEE ATTACHED FOR SUBMITTED MODIFICATION :



SIDE VIEW

FRONT VIEW

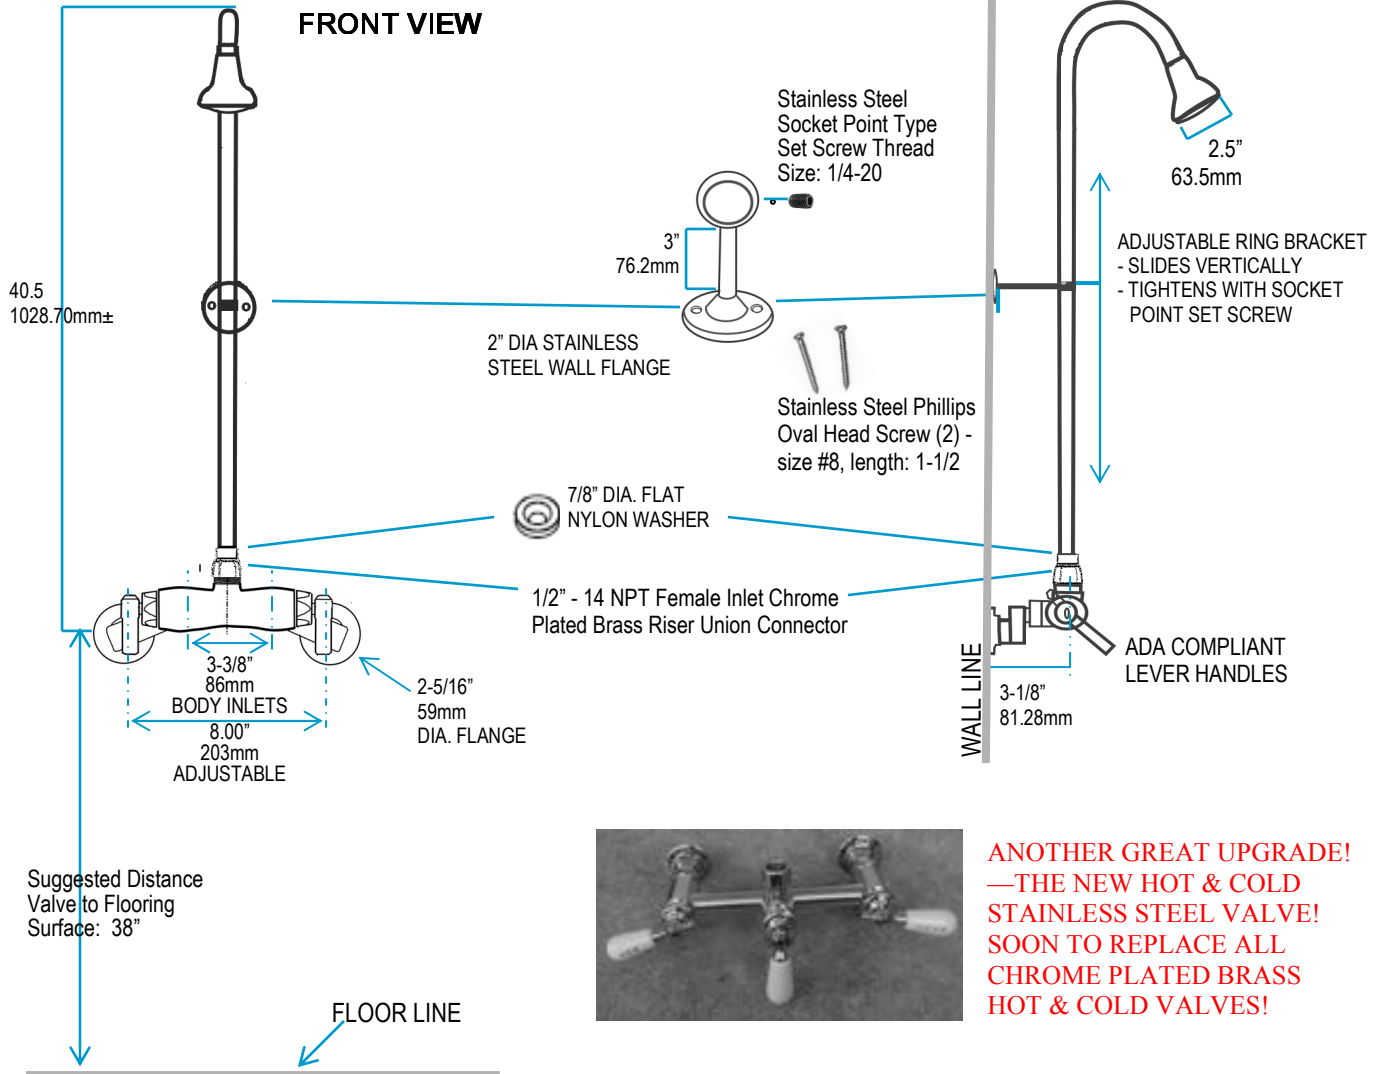

ANOTHER GREAT UPGRADE!
—THE NEW HOT & COLD STAINLESS STEEL VALVE!
SOON TO REPLACE ALL CHROME PLATED BRASS HOT & COLD VALVES!

DIMENSIONS MAY VARY PLUS OR MINUS 1/2" (12.7MM)

TECHNICAL DATA:

- EXPOSED WALL MOUNTED TWO VALVE SHOWER FITTING
- FINISH: CHROME PLATED BRASS
- 1/2" X 40" STAINLESS STEEL RISER TBE
- LEVER HANDLES
- 1/2" NPT FEMALE INLETS
- ADJUSTABLE SUPPLY ARMS
- 2.5 GPM SHOWER HEAD
- ASME A112.18.1M COMPLIANT
- CSA B125 COMPLIANT

DATE:

BY:

CHCKD:

APP'D:

REV:

OPTIONAL ACCESSORIES & UPGRADES

NOTE:

Flush supply lines before installing valve to remove chips and dirt which can become lodged in the seat washer and cause the faucet to malfunction.

WINTERIZING:

It is recommended that a shut-off valve be installed in the water line going to the pool shower connection where freezing temperatures can occur. Accessories and valve handles can be removed and other parts partially disassembled for complete protection against freeze damage.


DO NOT USE A PIPE WRENCH WHEN TIGHTENING SHOWER PARTS. THIS CAN DAMAGE THE FINISH.

FREEZE DAMAGE IS NOT COVERED BY THE WARRANTY.

QUESTIONS?

Give us a call: 1-866-shower1

FOOT SHOWER ASSEMBLY ACCESSORY—#AV-442-CHV

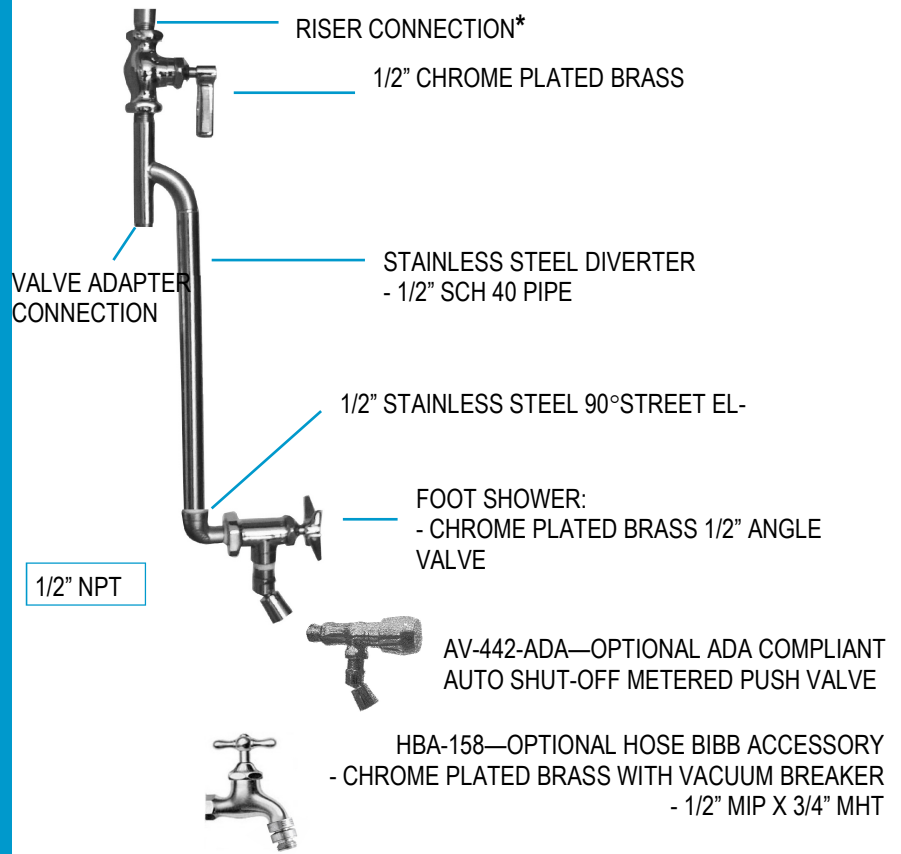

*39" RISER IS REPLACED WITH 32" RISER WHEN DIVERTER IS USED.

OPTIONAL SHOWER HEADS

4"-19" - Stainless Steel or Chrome Plated Brass



WMHC-445 Shower Units with 4" and larger shower heads have riser with 90° bend



HAND SPRAY & 60" STAINLESS STEEL HOSE

COMPLETE WITH HAND SPRAY BRACKET AND DIVERTER

